



D Band Gaussian Optics Antenna, 0.059" Dia Circular Waveguide, 6"

Description:

Model SAG-1441544601-059-S1 is a 6" D-Band Gaussian antenna that operates from 140 to 150 GHz. The Gaussian antenna delivers a 46 dBi nominal gain and 0.95 degree half power beamwidth. The antenna supports both linear and circular polarized waveforms and employs a corrugated feed horn to offer excellent aperture efficiency, high cross polarization rejections, and low side lobe levels. This model is equipped with a 0.059" diameter circular waveguide and UG-387/U-M flange as its input port. By adding a mode transition, SAGE Millimeter model number SWT-06059-SB, the input port becomes a standard WR-06 waveguide, which can support only linear polarized waveforms.



Features:

- Center Fed
- Low Side Lobes
- Low Cross Polarization
- Linear and Circular Polarization

Applications:

- Radar Systems
- Communication Systems
- Plasma Systems

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	140 GHz		150 GHz
Gain		46 dB	
3 dB Beamwidth		0.95°	
Side Lobes		-25 dB	
Polarization	Linear and Circular		
Return Loss		21 dB	
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

Mechanical Specifications:

Item	Specification
Antenna Port	0.059" Dia Circular Waveguide with UG-387/U-M Flange
Material	Aluminum
Finish	Black Anodized
Weight	7.2 lb
Lens Diameter	6.0"
Dimensions	7.31" (H) x 9.17" (L)
Outline	AG-CD46-059




www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com



D Band Gaussian Optics Antenna, 0.059" Dia Circular Waveguide, 6"

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

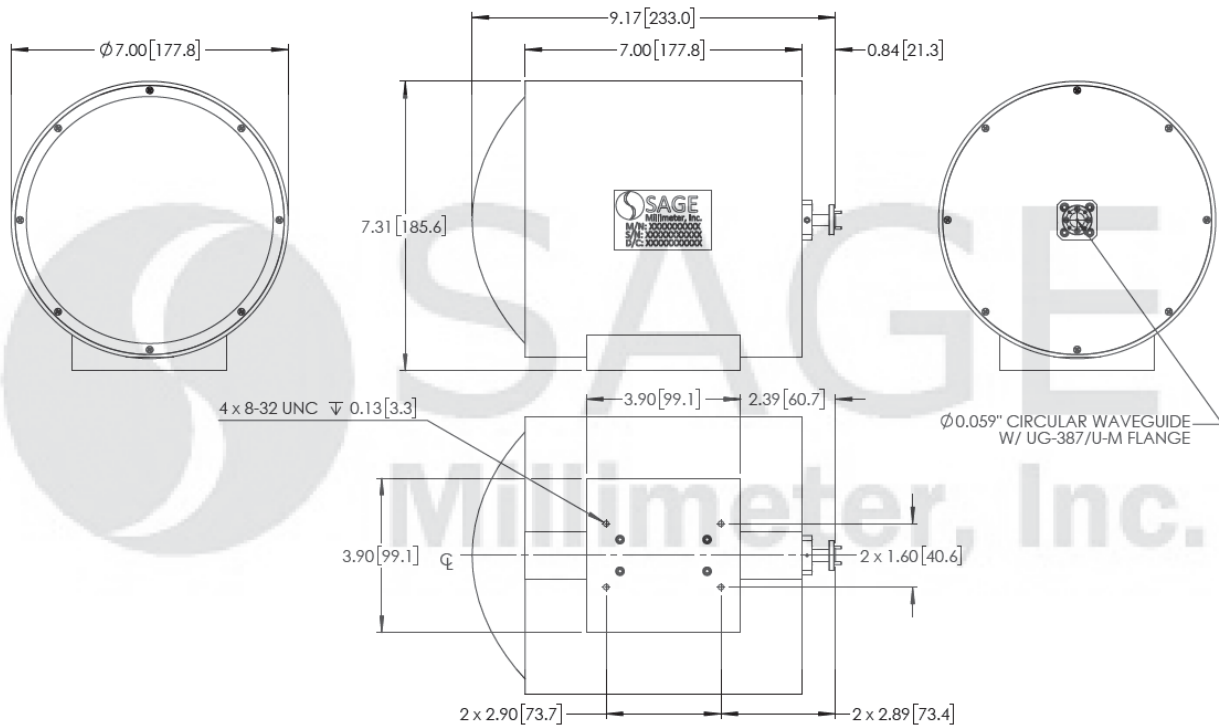

Note:

- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- The operation frequency of the antenna can be extended to a wider range with small performance degradation at the edges of the band.

Caution:

- Foreign objects in the waveguide will affect the antenna performance and may damage the antenna.

