



K-Band Quadrature Mixer or Phase Detector, 20 to 30 GHz

Description:

Model SFQ-20330311-KFKFSF-N1-M is a K Band quadrature mixer that covers the frequency range of 20 to 30 GHz. The typical conversion loss of the quadrature mixer is 11 dB with an LO driving power of +17 dBm. The typical LO to RF port isolation is 30 dB. Since the IF port of the quadrature mixer is DC coupled, the mixer can be used as a phase detector. In addition, the mixer can be readily configured into an image rejection mixer or single sideband modulator by adding an IF quadrature coupler.



Features:

- Compact Package
- Low Conversion Loss
- High Port Isolations
- IF Port DC Coupled for Phase Detection

Applications:

- Phase Detection
- Speed and Ranging Radar Systems
- Communication Systems
- Test Equipment

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
RF Frequency	20 GHz		30 GHz
LO Frequency	20 GHz		30 GHz
LO Pumping Power	+16 dBm	+17 dBm	+18 dBm
IF Frequency	DC		5.0 GHz
Conversion Loss		11 dB	13 dB
I/Q Phase Unbalance		±15°	
I/Q Amplitude Unbalance		±1.0 dB	
RF to LO Port Isolation		20 dB	
Combined RF & LO Power			+20 dBm
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

Mechanical Specifications:

Item	Specification
RF Port	K(F)
LO Port	K(F)
IF-I & IF-Q Ports	SMA(F)
Case Material	Aluminum
Finish	Gold Plated
Weight	0.68 Oz
Size	0.8" (L) X 0.8" (W) X 0.39" (H)
Outline	UH-235-4C







K-Band Quadrature Mixer or Phase Detector, 20 to 30 GHz

Typical Conversion Loss vs. Frequency

LO Power: 17 dBm; RF Power: -20 dBm

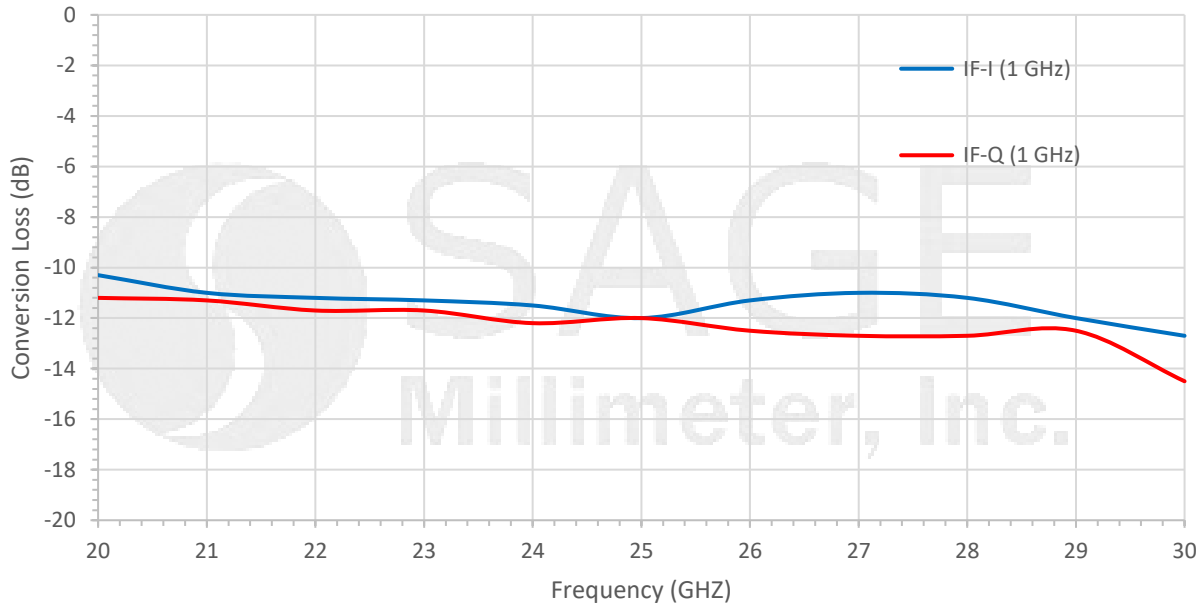

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

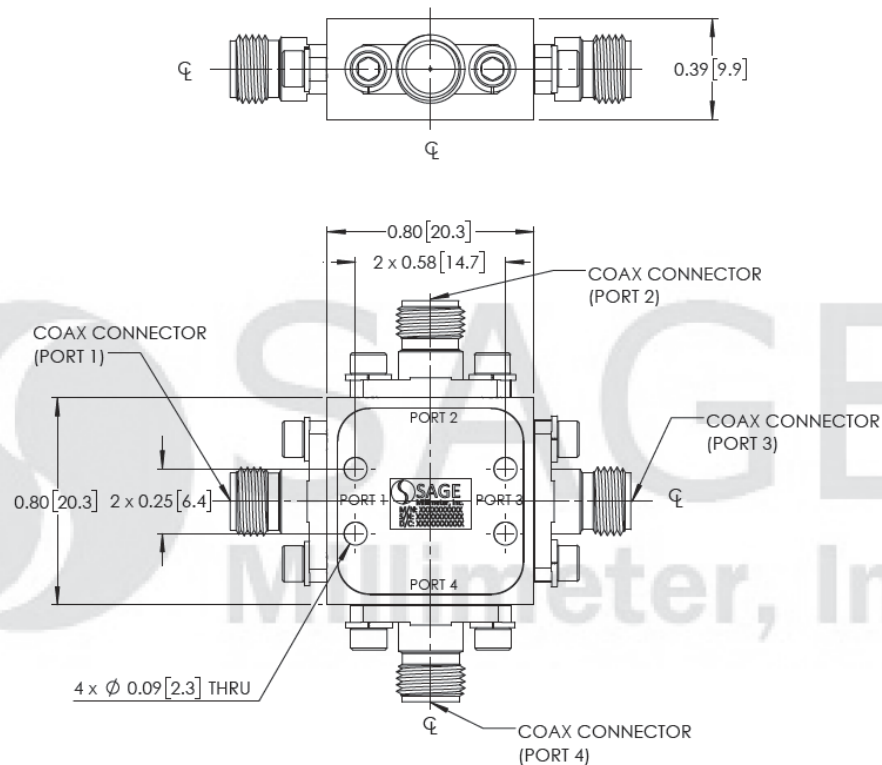



K-Band Quadrature Mixer or Phase Detector, 20 to 30 GHz

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit slightly.
- All testing was performed under +25 °C case temperature.
- The I/Q mixer can be configured as an image rejection mixer or used as an I/Q up-converter, single sideband modulator and phase detector.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings will damage the device.
- The mixer is a static sensitive device. Always follow ESD rules when working with the device.
- The IF ports are DC coupled. Use DC blocks if necessary. **Do not apply an external bias voltage to the IF port.**
- Proper torque, 8.0 ± 0.15 inch-pounds (0.92 ± 0.05 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

