



E-Band Receiver, 76 to 81 GHz, 18 dB Gain, 6 dB NF

Description:

Model SSR-7930536018-12-S2 is an E-Band integrated receiver module. The receiver module has a typical noise figure of 6 dB and conversion gain of 18 dB in the frequency range of 76 to 81 GHz. The IF output frequency range is 1 to 6 GHz. The required LO power and frequency are +13 dBm and 6.25 GHz, respectively. The LO and IF port are both equipped with female SMA connectors and the RF port is with a WR-12 waveguide with UG-387/U flange.



Features:

- Compact Size
- High Conversion Gain
- Fully Integrated Module

Applications:

- E Band Communication Systems
- Radar Systems
- Passive Camera Systems

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
RF Input Frequency	76 GHz		81 GHz
RF Input Power		-30 dBm	
Damage RF Power			0 dBm
IF Output Frequency	1 GHz		6 GHz
RF to IF Conversion Gain		18 dB	
Input Noise Figure		6.0 dB	
LO Input Frequency		6.25 GHz	
LO Input Power		+13 dBm	+16 dBm
LO DC Bias Voltage	+5 V _{DC}	+8 V _{DC}	+15 V _{DC}
LO DC Bias Current		550 mA	
Input Return Loss		10 dB	
Specification Temperature		+ 25 °C	
Operating Temperature	0 °C		+ 50 °C

Mechanical Specifications:

Item	Specification
RF Port	WR-12 Waveguide with UG-387/U Flange
IF Port	SMA (F)
LO Port	SMA (F)
Housing	Aluminum
Bias	Solder Pin
Weight	2.0 Oz
Finishing	Gold Plated
Size	1.10" (W) X 2.50" (L) X 0.50" (H)
Outline	SR-SE




www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com




E-Band Receiver, 76 to 81 GHz, 18 dB Gain, 6 dB NF

Typical Conversion Gain vs. Frequency

+8 V_{DC}/550 mA

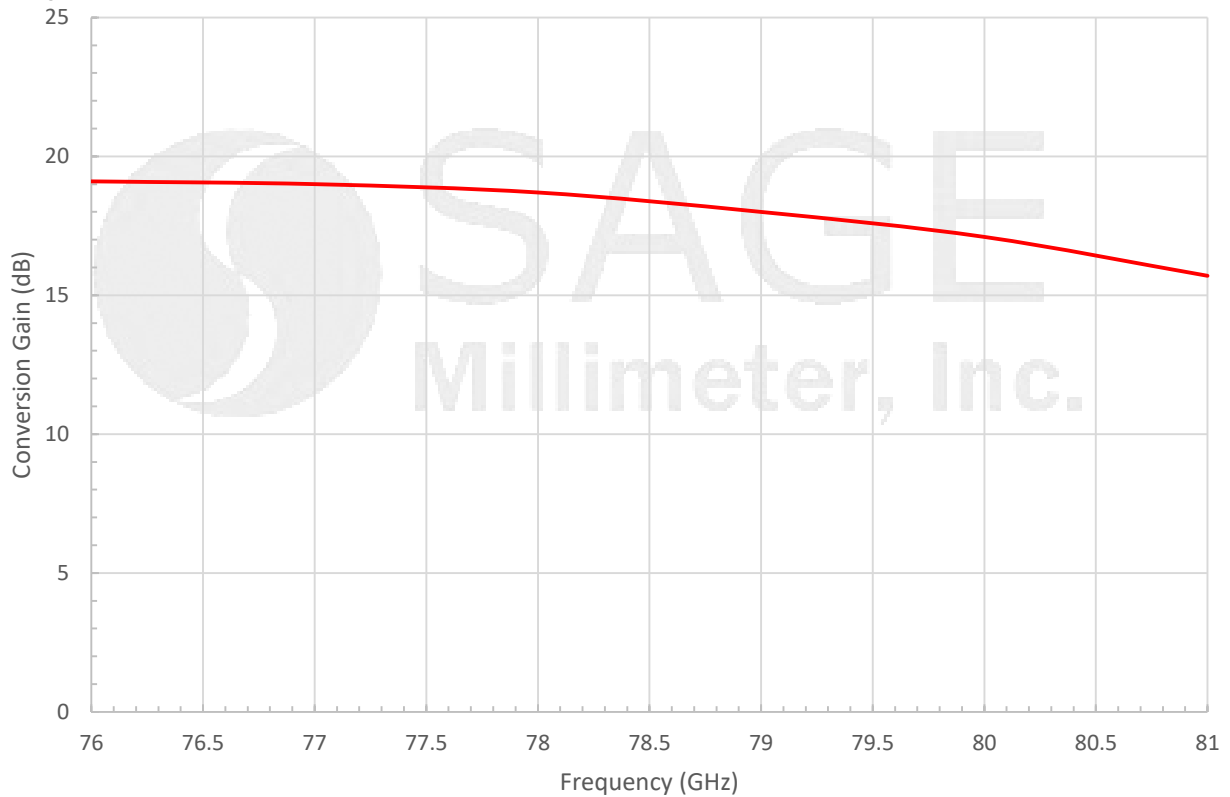

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches[millimeters])

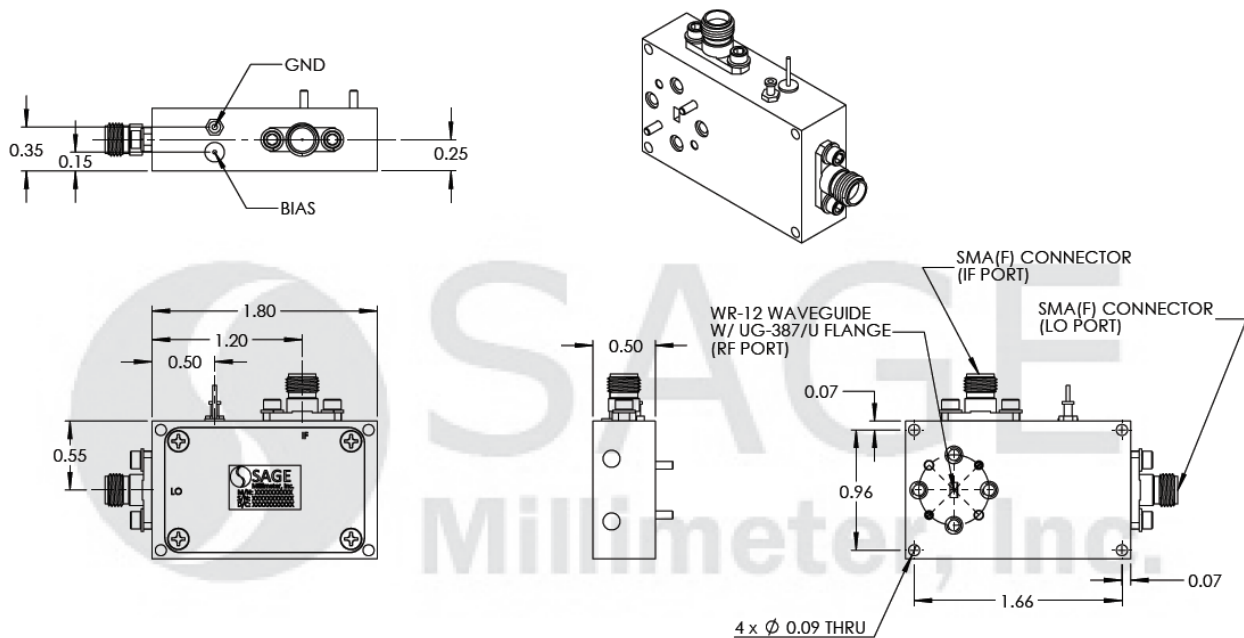

www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com

E-Band Receiver, 76 to 81 GHz, 18 dB Gain, 6 dB NF

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25°C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings of the device will damage the device.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.92 ± 0.05 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**
- Any foreign objects in the waveguide will cause performance degradation and possible device damage.

