

## Radar Target Simulator, Direct Reading, 35 GHz

### Description:

**Model STR-353-28-D1** is a radar doppler simulator that operates at 35 GHz with a bandwidth of  $\pm 150$  MHz and a WR-28 waveguide input/output. The simulator utilizes a single-sideband-modulator to modulate the incoming signal transmitted by the radar under test and sends back either a higher or lower band signal through a diplexer. The frequency-shifted signal is transmitted back to the radar under test as a Doppler signal. Target characteristics are adjusted by changing the I and Q channel frequency and phase. The routing attenuation is adjusted by the direct reading attenuator.



### Features:

- Single Sideband Output
- Simulated Target Speed and Size Adjustable
- Simulated Target Moving Direction Switchable
- Instrumentation Grade

### Applications:

- Doppler Target Simulations
- Radar System Testing

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Center Frequency		35 GHz	
RF Bandwidth		$\pm 150$ MHz	
Carrier Rejection		25 dB	
Image Rejection		20 dB	
Routing Loss Range		25 to 125 dB	
I/Q Frequency Range	DC		150 MHz
I/Q Voltage			$\pm 10 V_{p-p}$
I/Q Current			10 mA
I/Q Phase Error		$\pm 5^\circ$	
Specification Temperature		$+25^\circ\text{C}$	
Operating Temperature	$+0^\circ\text{C}$		$+50^\circ\text{C}$

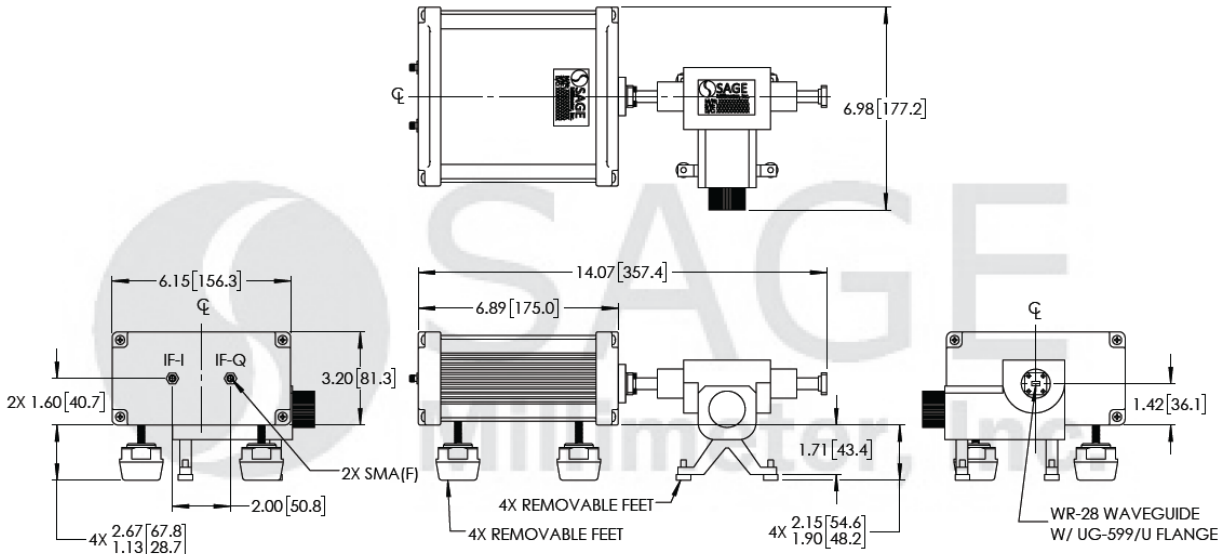
### Mechanical Specifications:

Item	Specification
RF Port	WR-28 Waveguide with UG-599/U Flange
I/Q Ports	SMA(F)
Finish	Black Anodized
Size	6.98" (W) x 14.07" (L) x 5.10" (H)
Outline	TR-AD



## Radar Target Simulator, Direct Reading, 35 GHz

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

**Note:**

- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- Models with different operation frequencies are available under a different model numbers.
- A 35 GHz Radar Target Simulator with a **level setting attenuator**, instead of a direct reading attenuator, is available as model **STR-353-42-L1**.

**Caution:**

- Exceeding absolute maximum ratings of the device will damage the device.
- Proper torque,  $8.0 \pm 0.15$  inch-pounds ( $0.92 \pm 0.05$  Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.

