

## Waveguide Bandpass Filter, V Band, 50 to 67 GHz

### Description:

**Model SWF-59317340-15-B1** is a V band waveguide bandpass filter with a passband frequency of 50 to 67 GHz and rejection frequencies from DC to 46 GHz and 73 to 110 GHz. The nominal insertion loss of the bandpass filter is 2.0 dB and the typical rejection is 40 dB. Since both low end and high end cut off frequencies can be selected by modifying the design, custom designs are available under different model numbers.



### Features:

- Low Cost
- Low Insertion Loss
- High Rejection

### Applications:

- IEEE 802.11ad WiGig Systems
- Communication Systems
- Radar Systems
- Sub-assemblies

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Passband Frequency	50 GHz		67 GHz
Passband Insertion Loss		2.0 dB	3.0 dB
Passband Ripple		±0.50 dB	
Rejection Frequency, Low Side	DC		46 GHz
Rejection Frequency, High Side	73 GHz		110 GHz
Rejection		40 dB	
Passband Return Loss		14 dB	
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

### Mechanical Specifications:



Item	Specification
Waveguide Ports	WR-15 Waveguide with UG-385/U Anti-Cocking Flange
Material	Brass
Finish	Gold Plated
Weight	3.6 Oz
Size	2.00" (L) X 0.75" (W) X 0.75" (W)
Outline	WF-BV-L1-A





## Waveguide Bandpass Filter, V Band, 50 to 67 GHz

### Typical Performance vs. Frequency

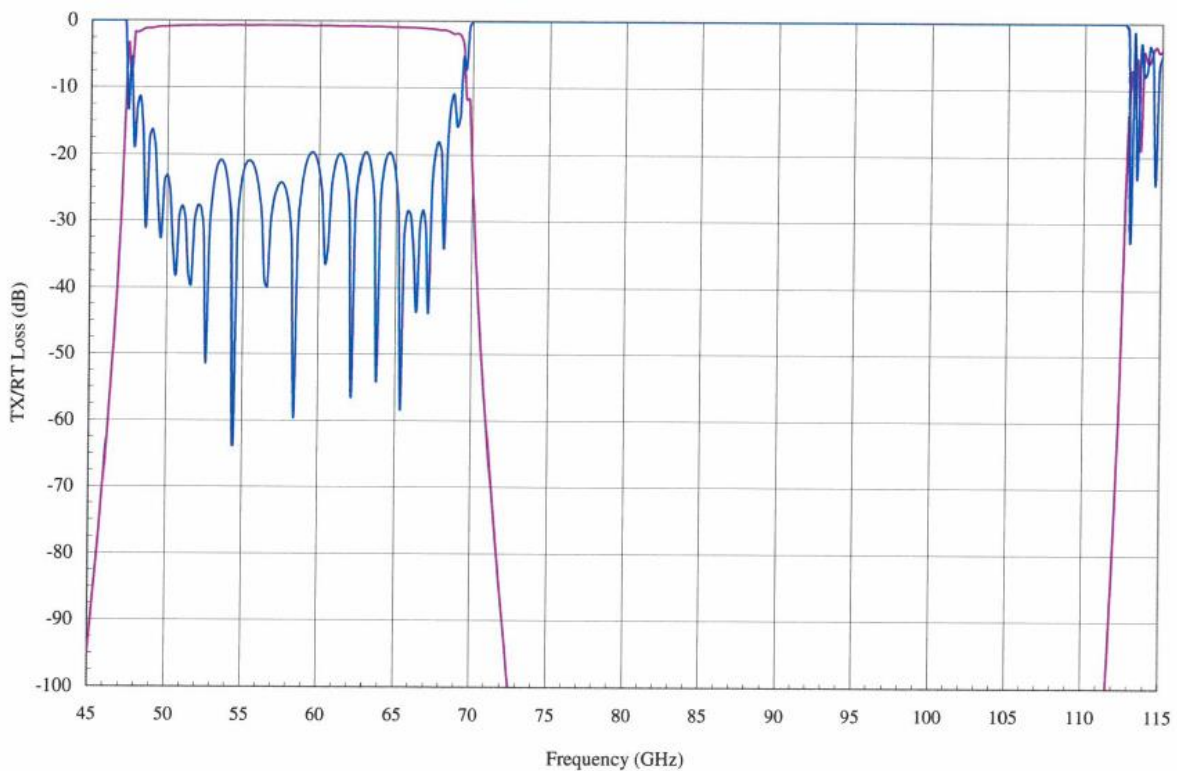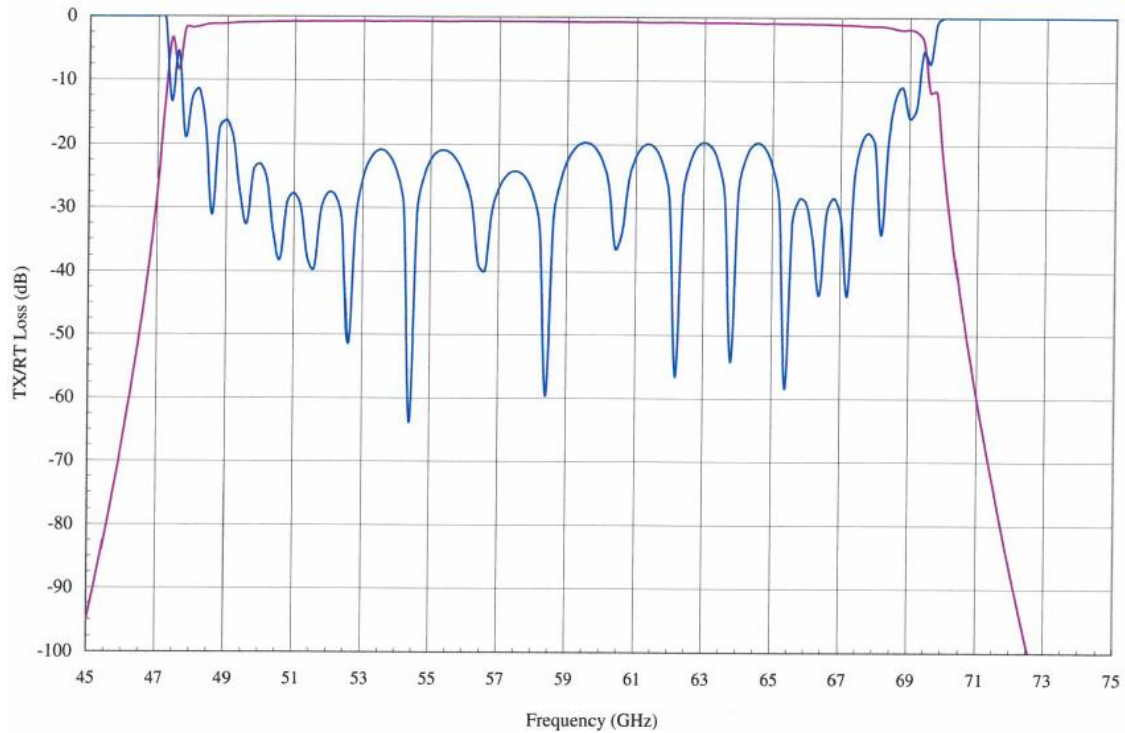


www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505  
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com



## Waveguide Bandpass Filter, V Band, 50 to 67 GHz

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

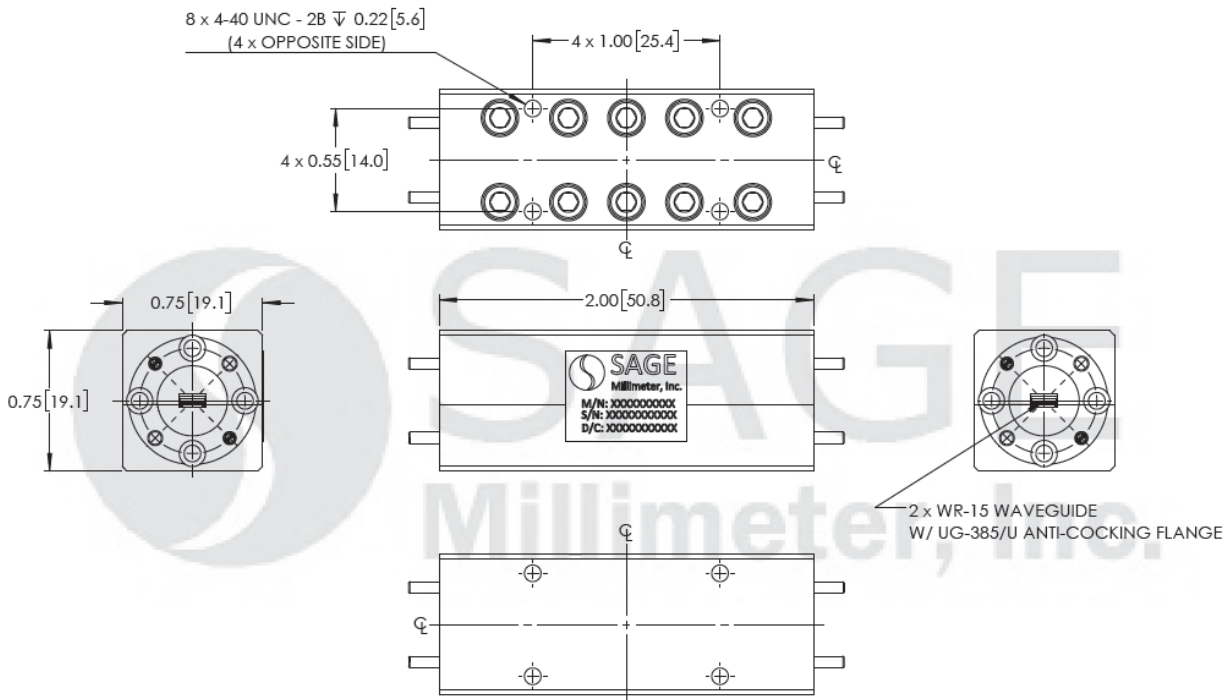

**Note:**

- All data presented is simulated. Actual data may vary, slightly.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

**Caution:**

- Any foreign objects in the waveguide will degrade performance and/or damage the device.

