



## X2 Active Frequency Multiplier, Ka Band, 20 to 40 GHz, +5 dBm P<sub>out</sub>

### Description:

**Model SFA-203403205-KFSF-S1** is an active X2 frequency multiplier. The multiplier has an input frequency of 10 to 20 GHz with a typical input power of +5 dBm and an output frequency of 20 to 40 GHz with a typical output power of +5 dBm. The multiplier also has a typical harmonic suppression of -15 dBc. The DC power requirement for the multiplier is +8 V<sub>DC</sub>/180 mA. The input port is a female SMA connector and the output is a female K connector. Other port configurations are available under different model numbers.



### Features:

- Wide Band Coverage
- High Output Power
- Low Harmonic Components

### Applications:

- 5G Systems
- Frequency Extenders
- Source Modules
- Communication Systems

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Input Frequency	10 GHz		20 GHz
Input Power	+1 dBm	+5 dBm	+10 dBm
Output Frequency	20 GHz		40 GHz
Output Power		+5 dBm	
Harmonic Suppression		-15 dBc	
Spurious		-60 dBc	
Port Return Loss		10 dB	
DC Voltage	+6 V <sub>DC</sub>	+8 V <sub>DC</sub>	+12 V <sub>DC</sub>
DC Supply Current		180 mA	
Specification Temperature		+25°C	
Operating Temperature	0°C		+50°C

### Mechanical Specifications:

Item	Specification
Input	SMA (F)
Output	K (F)
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	1.3 Oz
Size	1.20" (W) x 1.20" (L) x 0.50" (H)
Outline	BG-SC-1







## X2 Active Frequency Multiplier, Ka Band, 20 to 40 GHz, +5 dBm P<sub>out</sub>

### Typical Output P<sub>out</sub> vs. Frequency

Bias = +8 V<sub>DC</sub>/180 mA; Input Power: +5 dBm

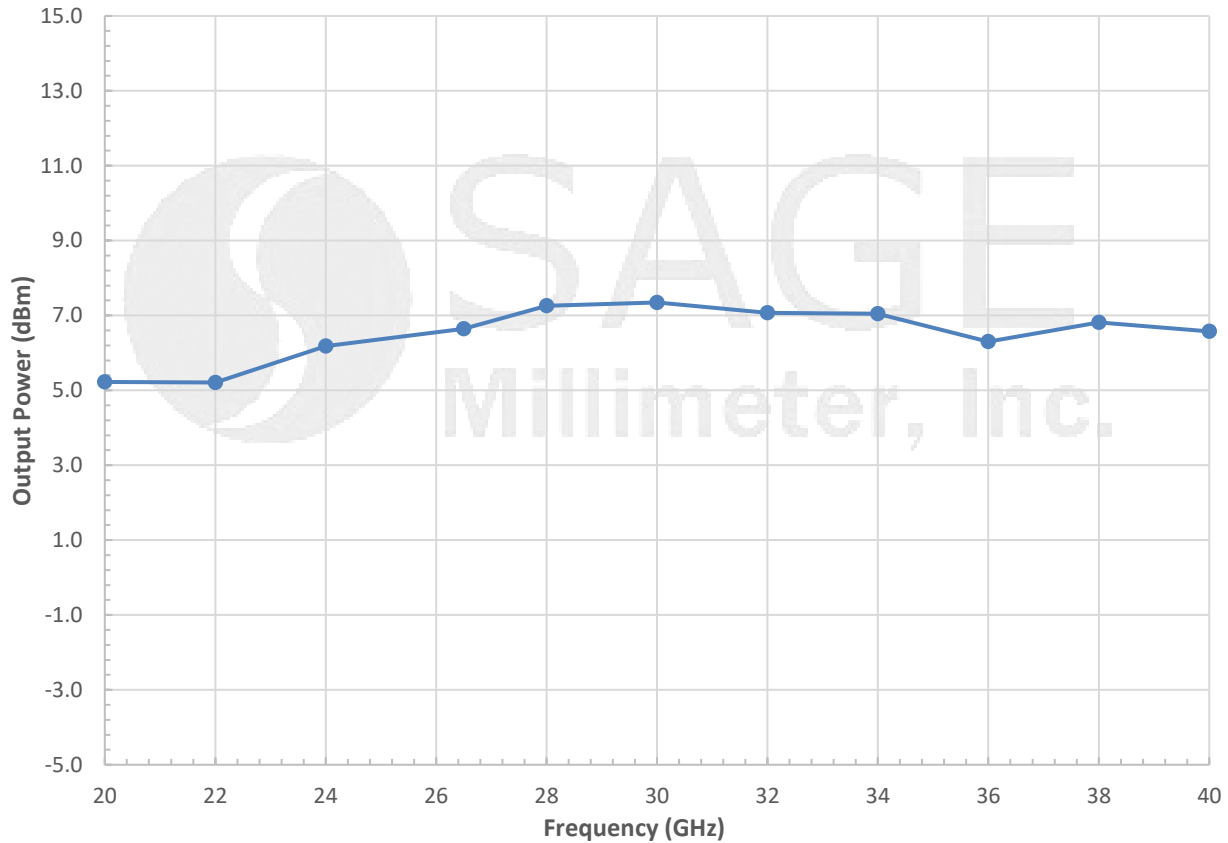

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

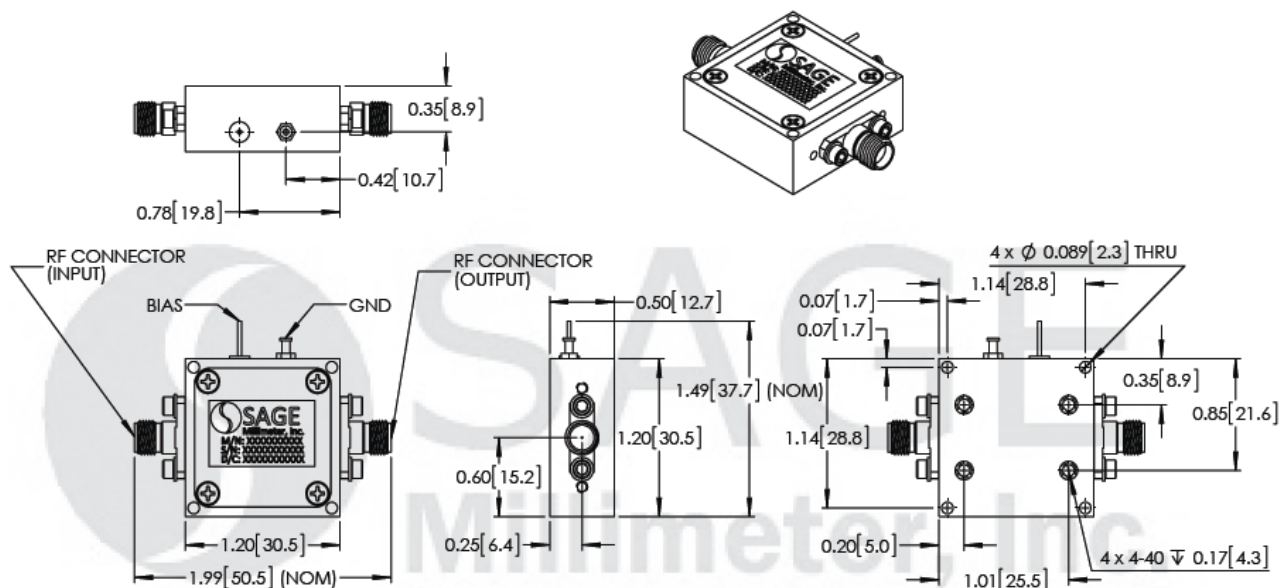

## X2 Active Frequency Multiplier, Ka Band, 20 to 40 GHz, +5 dBm P<sub>out</sub>

### Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit slightly.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

### Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- Proper torque,  $8.0 \pm 0.15$  inch-pounds ( $0.90 \pm 0.02$  Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

