



## V-Band Power Amplifier, 50 to 70 GHz, 25 dB Gain, 18 dBm P-1

### Description:

**Model SBP-5037032518-1515-E1** is a power amplifier with a typical small signal gain of 25 dB and a nominal  $P_{1dB}$  of +18 dBm across the frequency range of 50 to 70 GHz. The DC power requirement for the amplifier is +8 V<sub>DC</sub>/650 mA. The mechanical configuration offers an in line structure with WR-15 waveguides and UG-385/U flanges. Other port configurations, such as with 1.85 mm connectors or a right angle structure with WR-15 waveguides, are also available under different model numbers.



### Features:

- Broadband Performance
- High Output Power
- High Gain

### Applications:

- IEEE 802.11.ad WiGig
- Radar Systems
- Communication Systems
- Test Equipment

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	50 GHz		70 GHz
Gain		25 dB	
$P_{1dB}$		+18 dBm	
$P_{SAT}$		+21 dBm	
$P_{in}$			+13 dBm
Input VSWR		2:1	
Output VSWR		2:1	
DC Voltage	+6 V <sub>DC</sub>	+8 V <sub>DC</sub>	+15 V <sub>DC</sub>
DC Supply Current		650 mA	
Specification Temperature		+25°C	
Case Temperature	0°C		+50°C

### Mechanical Specifications:

Item	Specification
Input	WR-15 Waveguide with UG-385/U Flange
Output	WR-15 Waveguide with UG-385/U Flange
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	1.6 Oz
Size	1.10" (W) X 1.50" (L) X 0.75" (H)
Outline	BG-SV-2






## V-Band Power Amplifier, 50 to 70 GHz, 25 dB Gain, 18 dBm P-1


### Typical Gain and Return Loss vs. Frequency

Bias: +8 V<sub>DC</sub>/650 mA

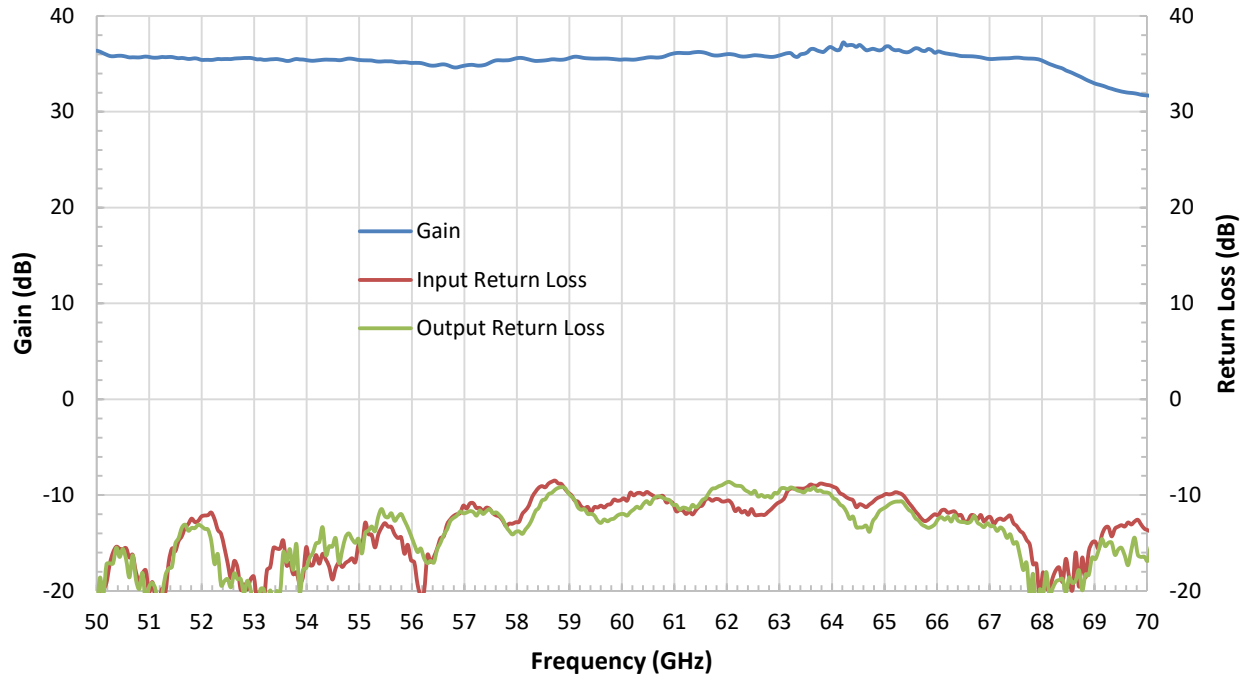

### Typical P<sub>1dB</sub> vs. Frequency


Bias: +8 V<sub>DC</sub>/650 mA

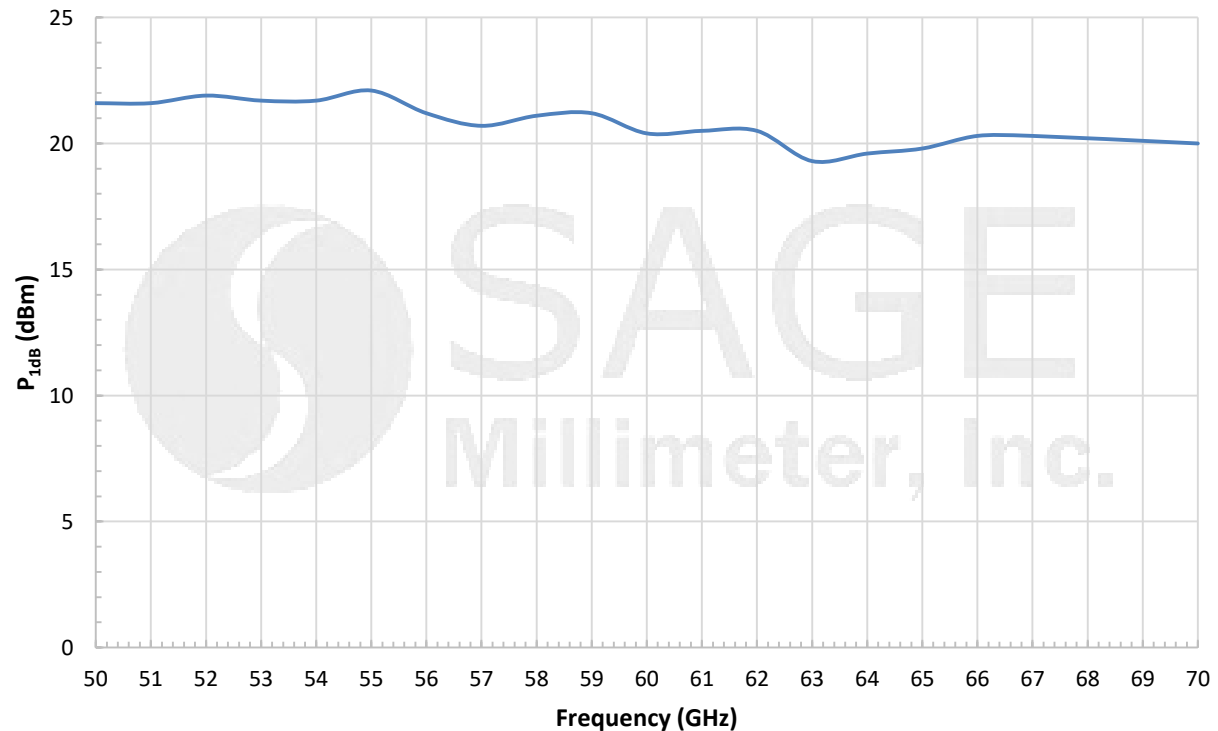



## V-Band Power Amplifier, 50 to 70 GHz, 25 dB Gain, 18 dBm P-1

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches)

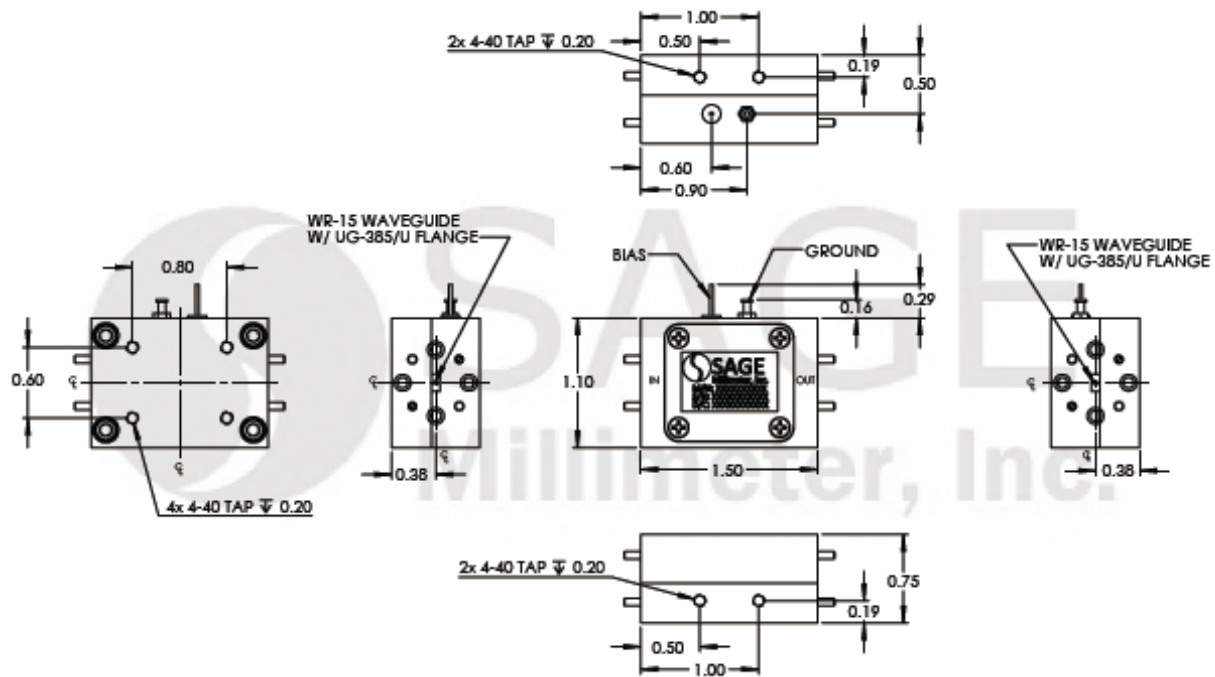

**Note:**

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25°C case temperature.
- Other mechanical configurations are available under different model number.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

**Caution:**

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50°C. Use proper heatsink or fan if necessary.
- Any foreign objects in the waveguide will cause performance degradation and possible device damage.

