



## SP8T PIN Switch with TTL Driver, Absorptive, 26 to 30 GHz

### Description:

**Model SK8-2633036555-KFKF-AD1** is an absorptive PIN diode based, single pole, eight throw switch with a TTL driver that operates between 26 and 30 GHz. The switch requires a separate -5 V and +5 V biasing in addition to the TTL control. This model offers a small form factor, typical 6.5 dB insertion loss, and 55 dB minimum isolation with a switching speed up to 50 nanoseconds. The switch has female K connectors for all RF ports and solder pins for bias port and TTL control.



### Features:

- Low Insertion Loss
- High Isolation
- Absorptive
- TTL Controlled

### Applications:

- Radar Systems
- Communication Systems
- Automatic Test Equipment
- Switching Network

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	26 GHz		30 GHz
Insertion Loss		6.5 dB	8.0 dB
Isolation	55 dB		
VSWR		2.0:1	2.5:1
Input RF Power		+20 dBm	+23 dBm
Bias Voltage	-5 V <sub>DC</sub>		+5 V <sub>DC</sub>
Bias Current	30 mA		100 mA
Control		TTL	
Switching Speed		50 nS	
Switch Type		Absorptive	
Specification Temperature		+25°C	
Operating Temperature	-45°C		+85°C

### Mechanical Specifications:


Item	Specification
Input Port	K(F)
Output Ports	K(F)
Bias	Solder Pins
Case Material	Aluminum
Finish	Gold Plated
Weight	3.52 Oz
Outline	K8-AC-D1






## SP8T PIN Switch with TTL Driver, Absorptive, 26 to 30 GHz

### Typical Insertion Loss and Isolation vs. Frequency

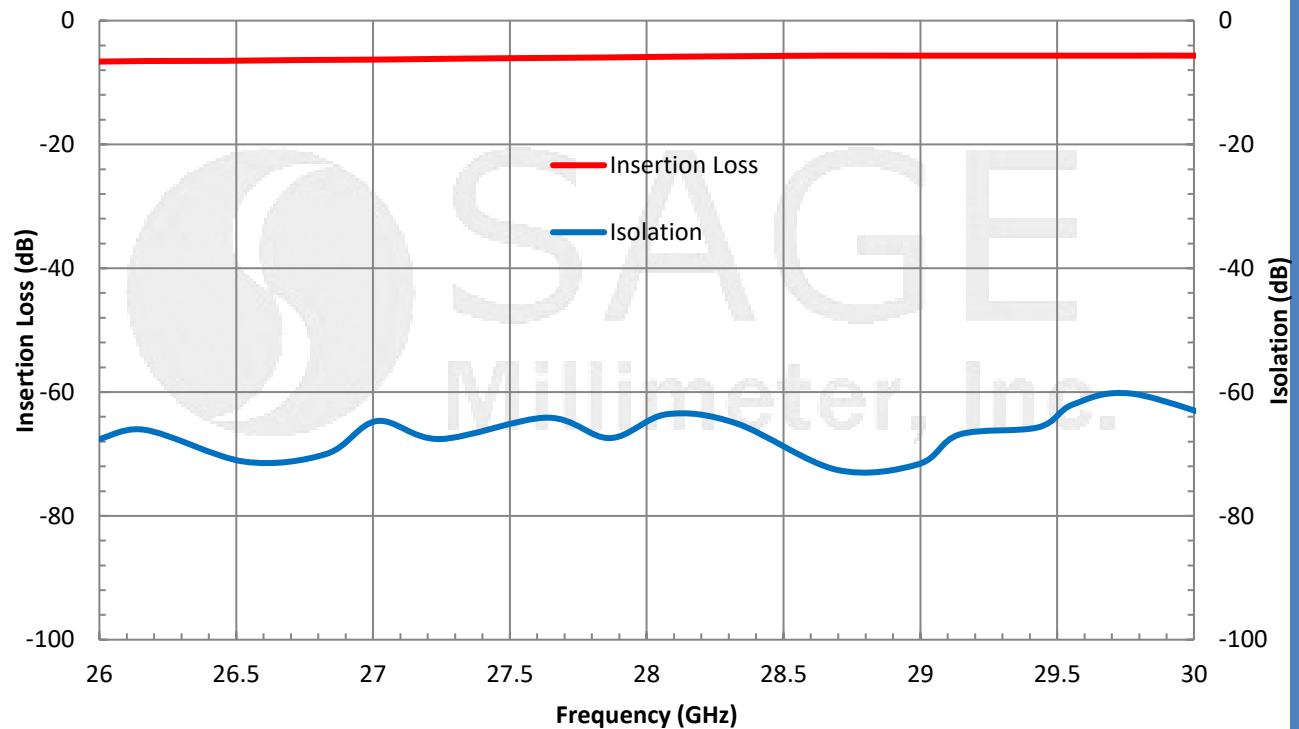


### Typical VSWR vs. Frequency

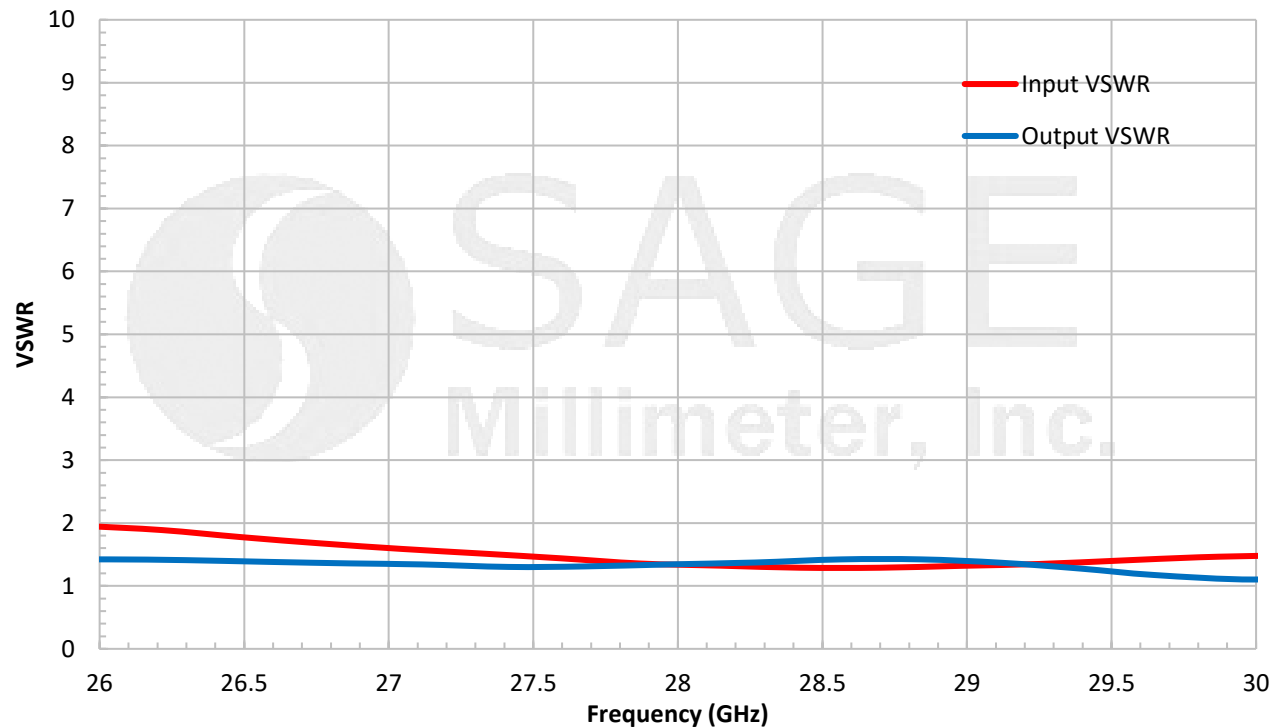



## SP8T PIN Switch with TTL Driver, Absorptive, 26 to 30 GHz

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

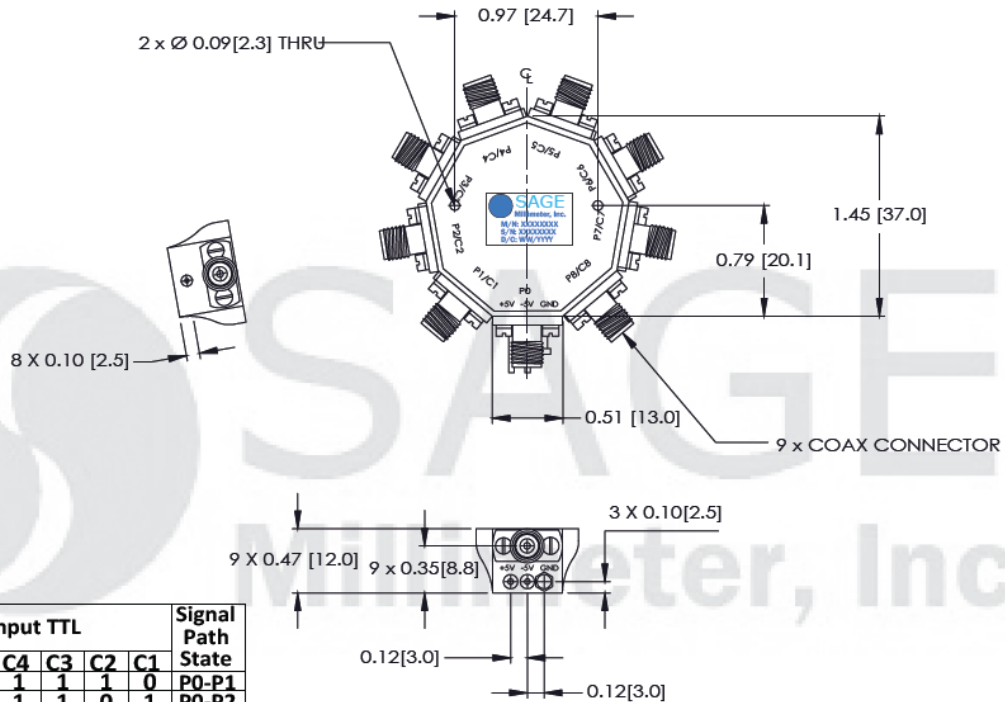

Control Input TTL							Signal Path State	
C8	C7	C6	C5	C4	C3	C2	C1	
1	1	1	1	1	1	1	0	P0-P1
1	1	1	1	1	1	0	1	P0-P2
1	1	1	1	1	0	1	1	P0-P3
1	1	1	1	0	1	1	1	P0-P4
1	1	1	0	1	1	1	1	P0-P5
1	1	0	1	1	1	1	1	P0-P6
1	0	1	1	1	1	1	1	P0-P7
0	1	1	1	1	1	1	1	P0-P8

Control Pin Customization available upon request

Driver Bias Range	
Positive Bias	+4.5 to +5.5V/100mA
* Negative Bias	0 to -5.0V/50mA

\*Note: The higher the negative, the faster the switching

**Note:**

- All data presented is collected from a sample lot. Actual data may vary unit to unit slightly.
- All testing was performed under +25°C case temperature.
- Other mechanical configurations are available under different model numbers.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

**Caution:**

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- Reversing polarity will destroy the device.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

