



## SPDT PIN Switch with TTL Driver, 0.5 to 43 GHz, Absorptive

### Description:

**Model SKD-0524334560-KFKF-A3** is an absorptive PIN diode based, single pole, double throw (SPDT) switch with a TTL driver that operates between 500 MHz and 43 GHz. This model offers a typical insertion loss of 4.5 dB and 60 dB port-to-port isolation with a typical switching speed of 100 nanoseconds. The switch has female K connectors for all RF ports and solder pins for DC bias and TTL control.



### Features:

- Ultrabroad Bandwidth
- High Isolation
- Compact Size
- Fast Control Speed

### Applications:

- 5G Systems
- Radar Systems
- Communication Systems
- Automatic Test Set
- Switching Network

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	0.5 GHz		43.0 GHz
Insertion Loss		4.5 dB	
Return Loss		10 dB	
Isolation		60 dB	
Operational RF Input Power			+20 dBm
Damage RF Input Power			+27 dBm
Bias Voltage		$\pm 5 V_{DC}$	
Bias Current		100/50 mA	
Control		TTL	
Switching Speed		100 ns	
Specification Temperature		+25 °C	
Operation Temperature	-45 °C		+85 °C

### Mechanical Specifications:


Item	Specification
Input Port	K(F)
Output Port	K(F)
Bias	Solder Pins
Logic Input	Solder Pins
Case Material	Aluminum
Finish	Gold Plated
Weight	1.06 Oz
Size	1.18" (L) X 1.00" (W) X 0.40" (H)
Outline	KD-AC-Z1






## SPDT PIN Switch with TTL Driver, 0.5 to 43 GHz, Absorptive

### Typical Performance vs. Frequency

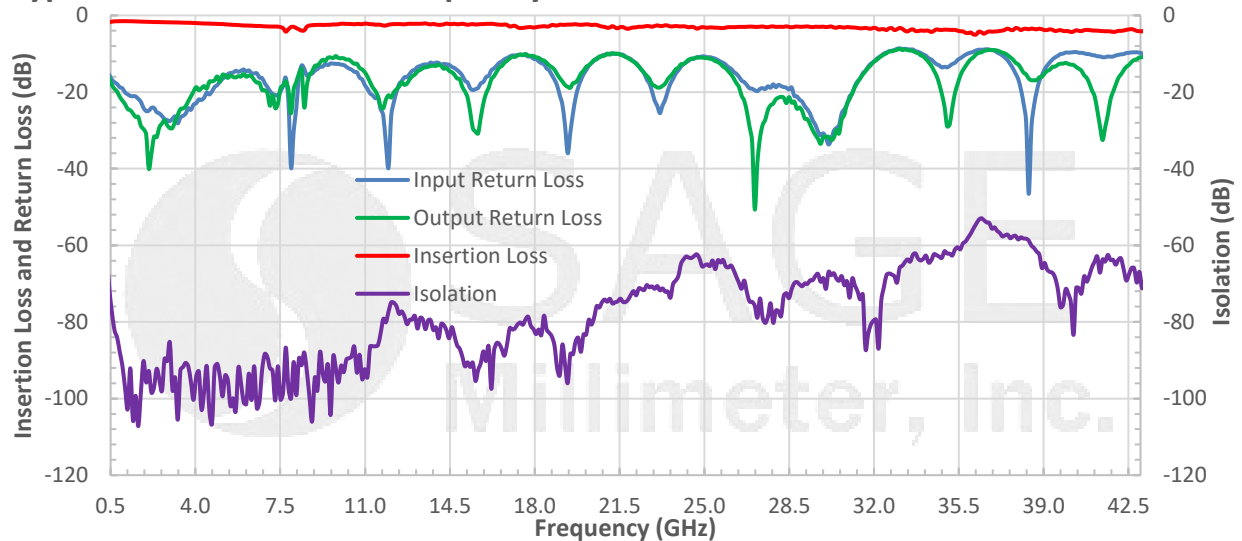

Note: The insertion loss, isolation and return loss between other ports are similar to the above plots.

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

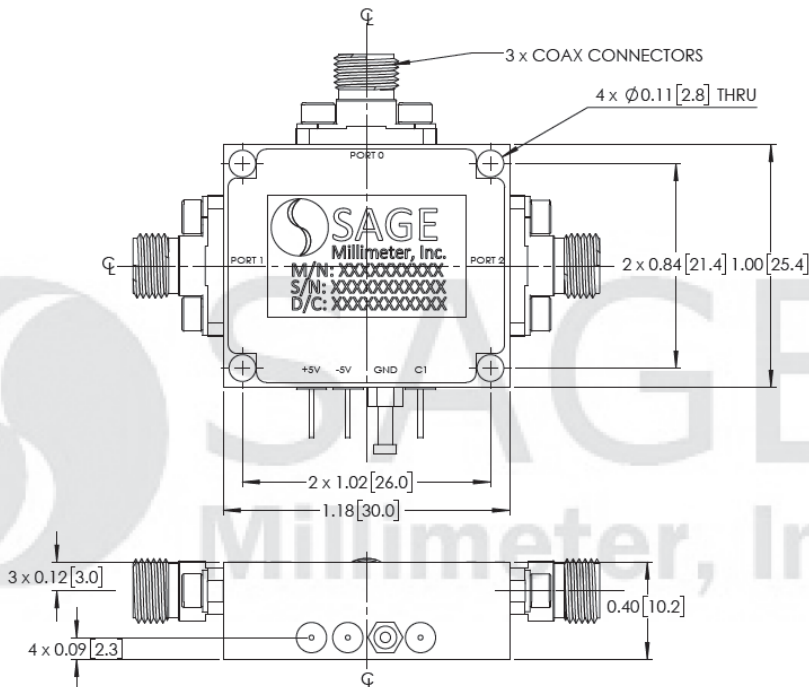

Truth Table	
CONTROL TTL INPUT (C1)	SIGNAL PATH STATE
0	PORT 0 - PORT 1
1	PORT 0 - PORT 2

TTL Voltages Range	
TTL Low	0 to 0.8Vdc
TTL High	2.0 to +5Vdc

Driver Bias Range	
Positive Bias	+4.5 to +5.5V/100mA
* Negative Bias	0 to -5.0V/50mA
<b>*Note: The higher the negative, the faster the switching</b>	





## SPDT PIN Switch with TTL Driver, 0.5 to 43 GHz, Absorptive

### Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit slightly.
- All testing was performed under +25 °C case temperature.
- Other mechanical configurations are available under different model numbers.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

### Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The switch is a static sensitive device. Always follow ESD rules when working with the switch.
- Proper torque,  $8.0 \pm 0.15$  inch-pounds ( $0.92 \pm 0.05$  Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

