



## U-Band Waveguide to 1.85mm Connector Adapter, End Launch

### Description:

Models SWC-19VF-E1 and SWC-19VM-E1 are end launch (180°) U-Band waveguide to coax adapters that cover the frequency range of 40 to 60 GHz. They are designed and manufactured for instrumentation grade quality but offered at a commercial grade price, allowing for an efficient transition between the rectangular waveguide and 1.85 mm (V) coax connector. The right angle (90°) versions are offered under model numbers SWC-19VF-R1 and SWC-19VM-R1.



### Features:

- Full Waveguide Band Coverage
- Lower Insertion Loss and VSWR
- Instrumentation Grade
- DC Short Circuit

### Applications:

- Test Lab
- Instrumentations
- Sub-assemblies

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	40 GHz		60 GHz
Insertion Loss		0.35 dB	
Return Loss		18 dB	
Power Handling			40 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-45 °C		+85 °C

### Mechanical Specifications:


Item	Parameter
Waveguide	WR-19 with UG383/U-M Flange
Coaxial	1.85 mm (V) Female for Model Number: SWC-19VF-E1
Coaxial	1.85 mm (V) Male for Model Number: SWC-19VM-E1
Size	0.89" (L) x 1.13" (Ø) for Model Number: SWC-19VF-E1
Size	0.93" (L) x 1.13" (Ø) for Model Number: SWC-19VM-E1
Housing Material	Aluminum
Finish	Gold Plated
Weight	0.4 Oz
Outline	WC-UE






## U-Band Waveguide to 1.85mm Connector Adapter, End Launch

### Typical Return Loss vs. Frequency (Back to Back)

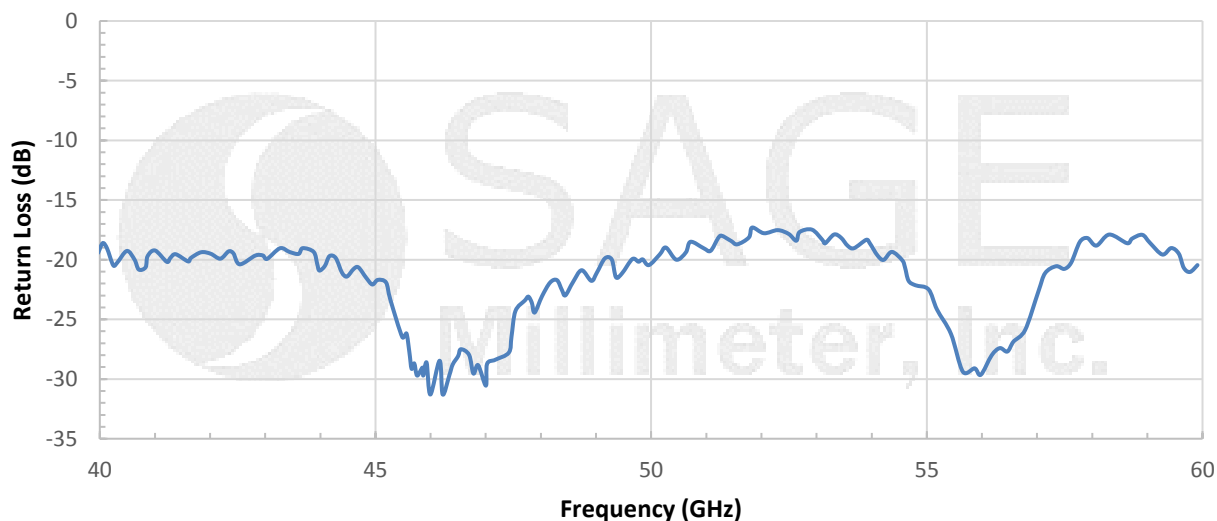

### Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

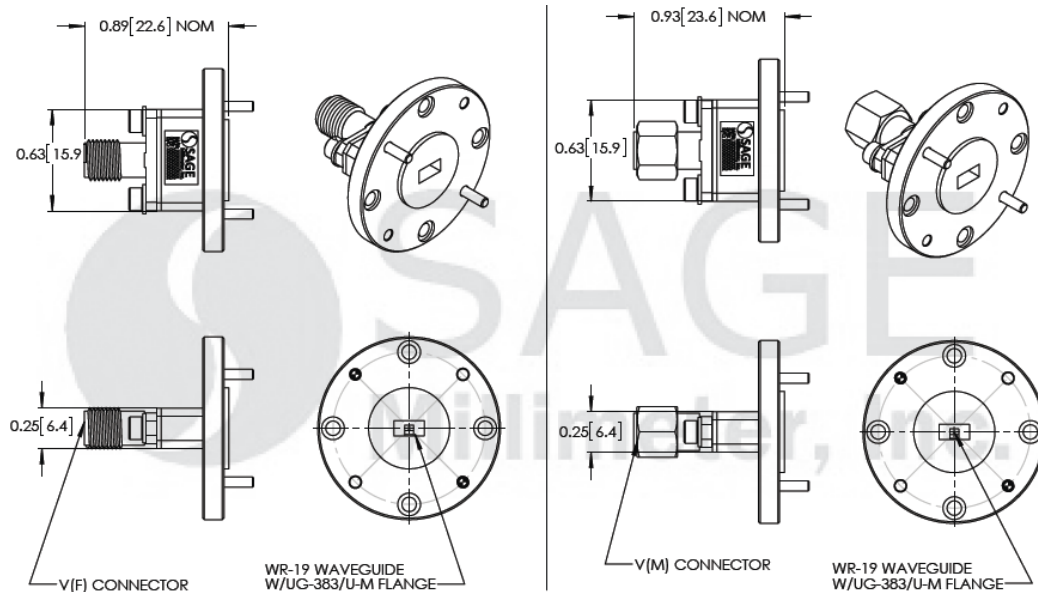

#### Note:

- All data are presented using a limited sample lot, actual data may vary unit to unit.
- All testing was performed under 25°C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

#### Caution:

- Any foreign objects in the waveguide will cause performance degradation and may damage the adapter.
- Proper torque,  $8.0 \pm 0.15$  inch-pounds ( $0.92 \pm 0.05$  Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505  
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com