



Q-Band Fixed Attenuator, 20 dB, 20 Watts

Description:

Model STA-20-222M2F-F1-43 is a 20 watt fixed attenuator that is used in millimeterwave systems and operates from 33 to 50 GHz. The attenuator has a nominal fixed attenuation value of 20 dB across the entire Q band. The attenuator is uniquely designed and fabricated for full waveguide band applications and displays an extremely flat frequency response across the full bandwidth. Various attenuation values are available under different model numbers.



Features:

- Full Band Coverage
- Low Cost

Applications:

- Test Lab
- Instrumentations
- System Integration

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	33 GHz		50 GHz
Attenuation		20 dB	
Return Loss		14 dB	
Power Handling		20 W (CW)	22 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

Mechanical Specifications:


Item	Specification
Input Port	2.4 mm Female
Output Port	2.4 mm Male
Setting	Fixed
Finish	Gold Plated
Weight	10 Oz
Insertion Length	7.41"
Outline	TA-FQC-43






Q-Band Fixed Attenuator, 20 dB, 20 Watts

Typical Performance vs Frequency

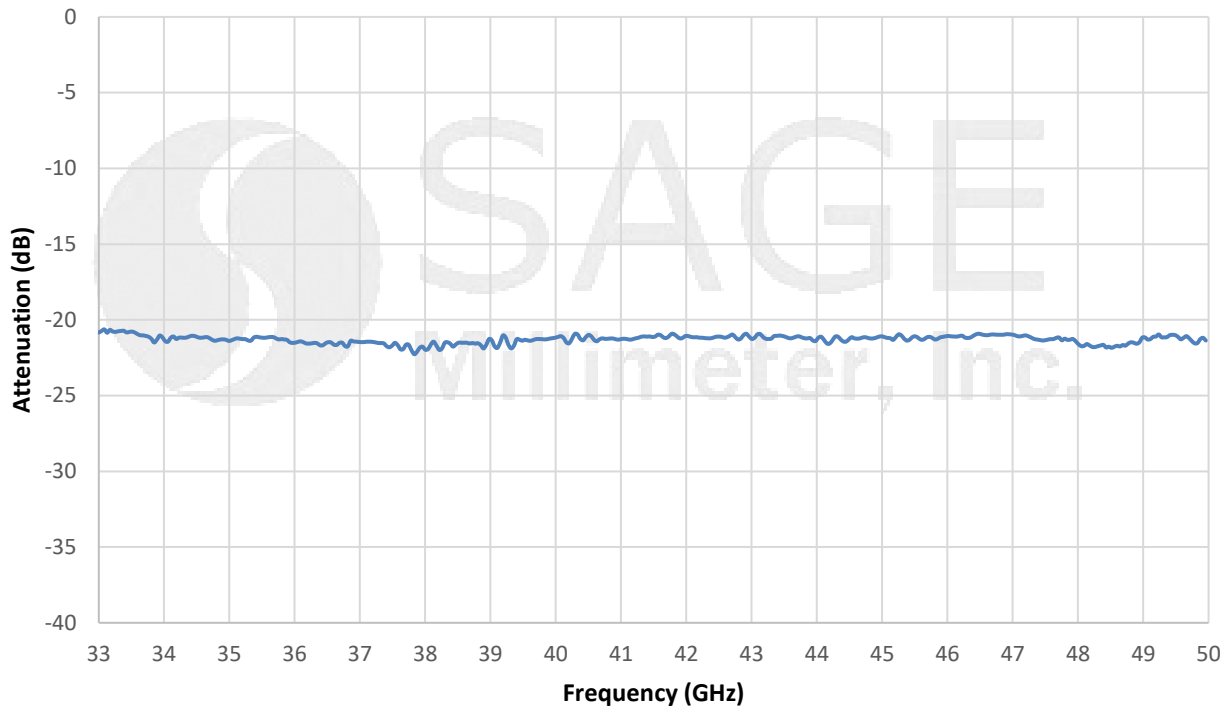

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

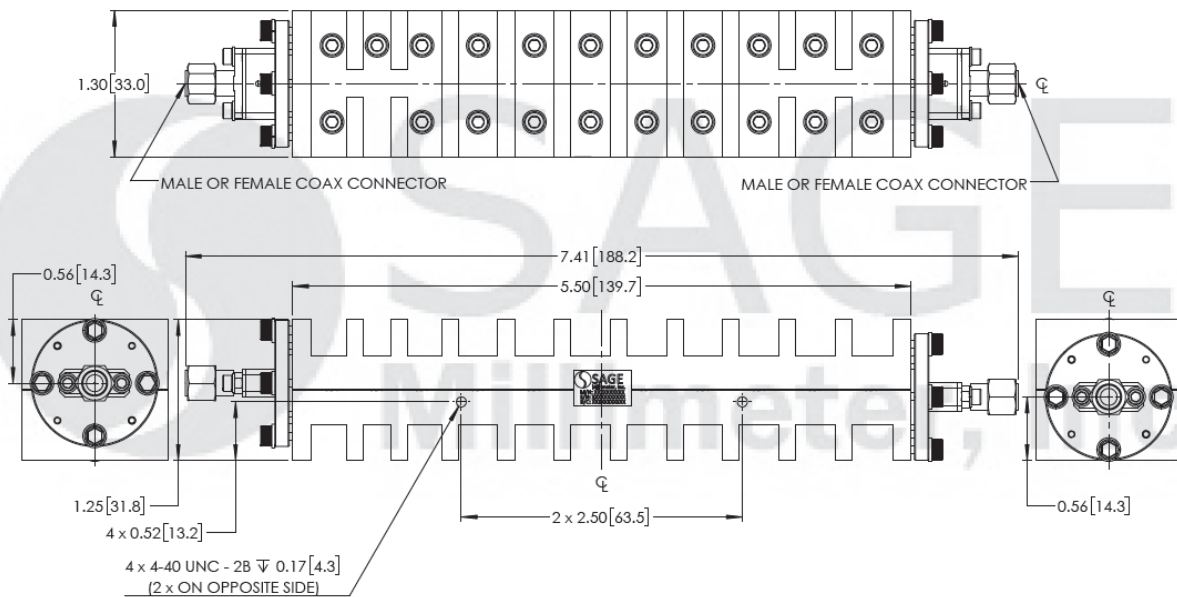



Q-Band Fixed Attenuator, 20 dB, 20 Watts

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25°C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

