



Waveguide Lowpass Filter, Ka Band, 22.0 to 34.0 GHz

Description:

Model SWF-34337340-28-L1 is a Ka band waveguide lowpass filter with a passband frequency from 22 to 34 GHz and the rejection frequencies of DC to 20 GHz and 37 GHz to 70 GHz, respectively. The filter provides a nominal insertion loss of 1.0 dB across its passband and a typical rejection of 40 dB. Since the high end cutoff frequency can be changed by modifying the design, custom designs can be offered under different model numbers.



Features:

- Low Insertion Loss
- High Rejection

Applications:

- 5G Systems
- Test Labs
- Instrumentations
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Passband Frequency	22 GHz		34 GHz
Passband Insertion Loss		1 dB	
Rejection Frequency, Low Side	DC		20 GHz
Rejection Frequency, High Side	37 GHz		70 GHz
Rejection		40 dB	
Passband Return Loss			14 dB
Power Handling			100 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C


Mechanical Specifications:

Item	Specification
Waveguide Ports	WR-28 Waveguide with UG-599/U Flange
Material	Brass
Finish	Gold Plated
Weight	8.7 Oz
Size	3.60" (L) X 0.75" (W) x 0.75" (H)
Outline	WF-LA-3.6






Waveguide Lowpass Filter, Ka Band, 22.0 to 34.0 GHz

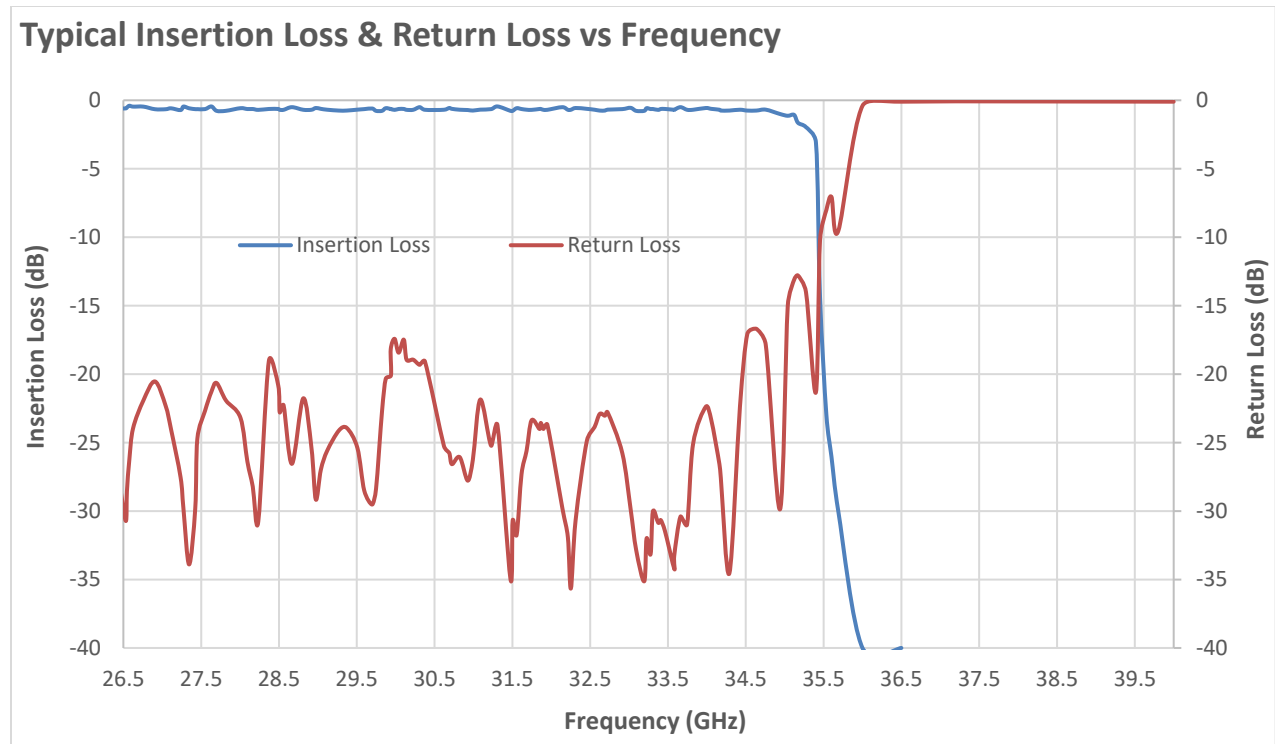

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

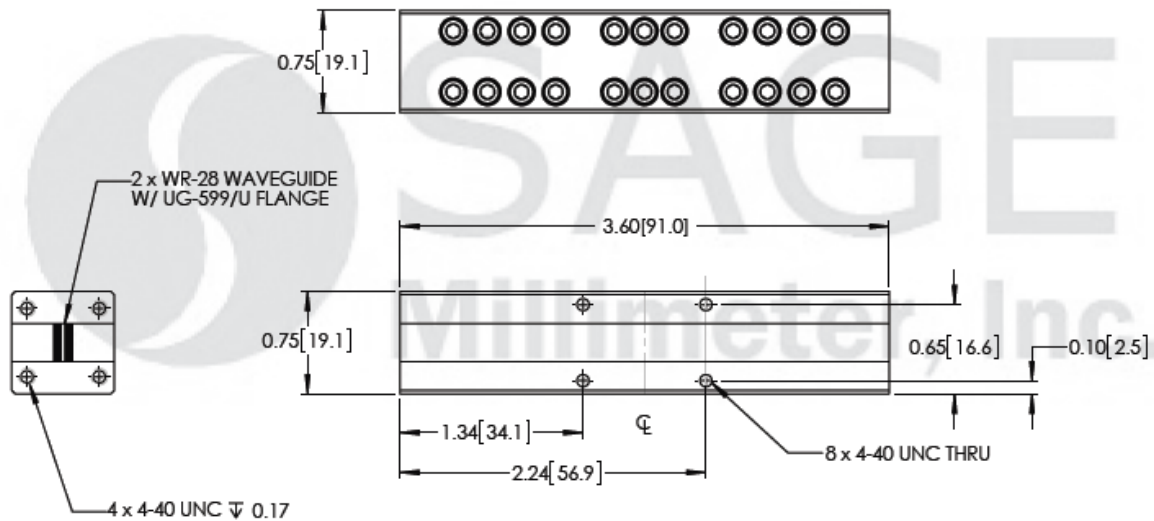

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit slightly.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the waveguide will degrade performance and/or damage the device.



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com