



## WR-28 Flexible Twistable Waveguide Section, 23.6" (600 mm) Long

### Description:

Models SWG-28236-FB-FT-G is a 23.6" (600 mm) long, Ka-band flexible twistable waveguide section with a WR-28 waveguide and UG-599/U grooved square flange. It also has a vulcanized silicone rubber jacket for robustness applications. The waveguide features a flexible bend with a static twist to be long-term stress free when it is integrated in a system. The flanges of the waveguide are grooved to accept rubber rings to be watertight for outdoor applications. The waveguide is manufactured with a precision manufacturing process to ensure high quality. The waveguide has low insertion loss in the frequency range of 26.5 to 40 GHz. Additional standard lengths and custom length options are available under different model numbers.



### Features:

- High Quality
- Flexible Bending and Static Twisting
- Comparable Cost to the Rigid Waveguide

### Applications:

- 5G Systems
- Communication Systems
- Various Outdoor Equipment

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	26.5 GHz		40 GHz
Insertion Loss		1.2 dB	
Return Loss		17 dB	
Power Handling			75 W (CW)
Specification Temperature		+25 °C	
Operation Temperature	-40 °C		+85 °C


### Mechanical Specifications:

Item	Specification
Waveguide Size	WR-28 Waveguide with UG-599/U Grooved Flange
Gasket	Non-conductive for Model Number: SWG-28236-FB-FT-G
Gasket	Conductive for Model Number: SWG-28236-FB-EM-FT-G
Minimum Bending Radius (Static)	E-plane: 1" (38 mm); H-plane: 2" (76 mm)
Minimum Bending Radius (Dynamic)	E-plane: 3" (80 mm); H-plane: 6" (160 mm)
Maximum Torsion Angle (Static)	465°/meter
Maximum Torsion Angle (Dynamic)	230°/meter
Material / Flange Finish / Waveguide Finish	Brass / Nickel Plated / Silver Plated
Waveguide Jacket Material	Vulcanized Silicone Rubber
Weight	4.5 Oz
Insertion Length	23.6" (600 mm) (±3 %)
Outline	WG-FA-FT-G-L



## WR-28 Flexible Twistable Waveguide Section, 23.6" (600 mm) Long

### Typical Performance vs. Frequency

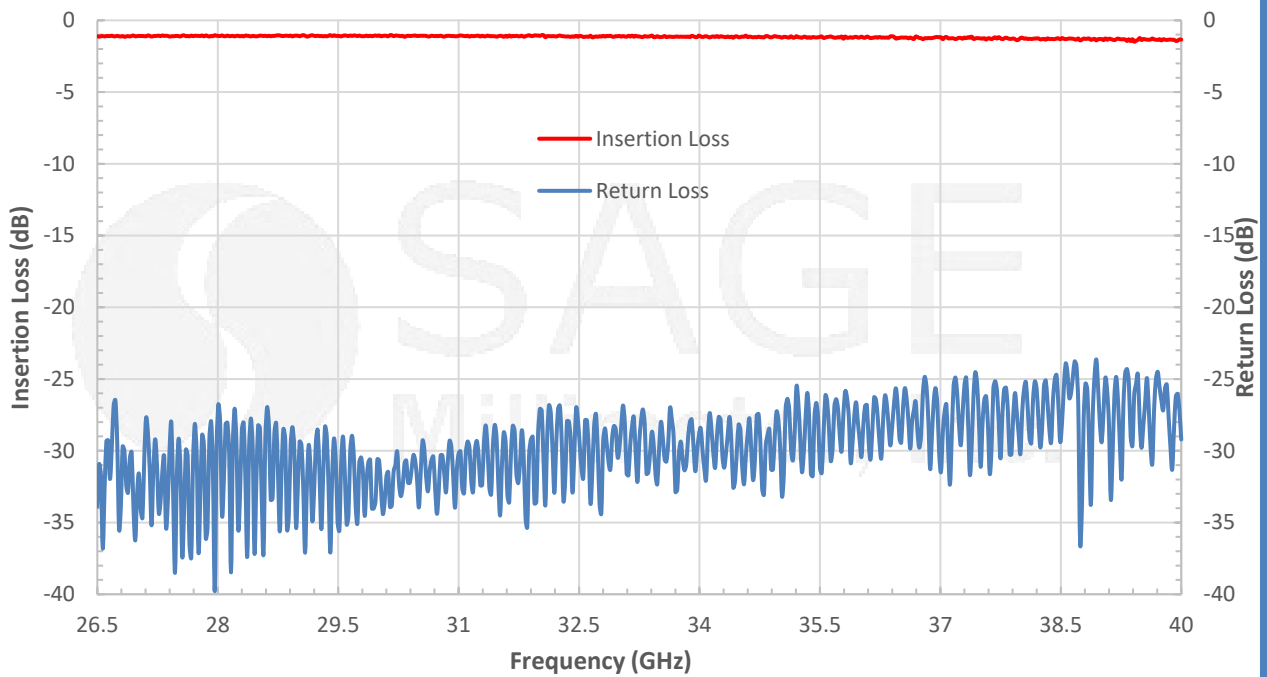

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])



**Note:**

- All data presented is collected from a sample lot. Actual data may vary unit to unit slightly.
- All testing was performed under +25 °C case temperature.
- Other mechanical configurations are available under different model numbers.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

**Caution:**

- Exceeding absolute maximum ratings shown will damage the device.
- Any foreign objects in the waveguide will cause performance degradation and possible device damage.



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505  
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com